


# Articulated Jib Hoist

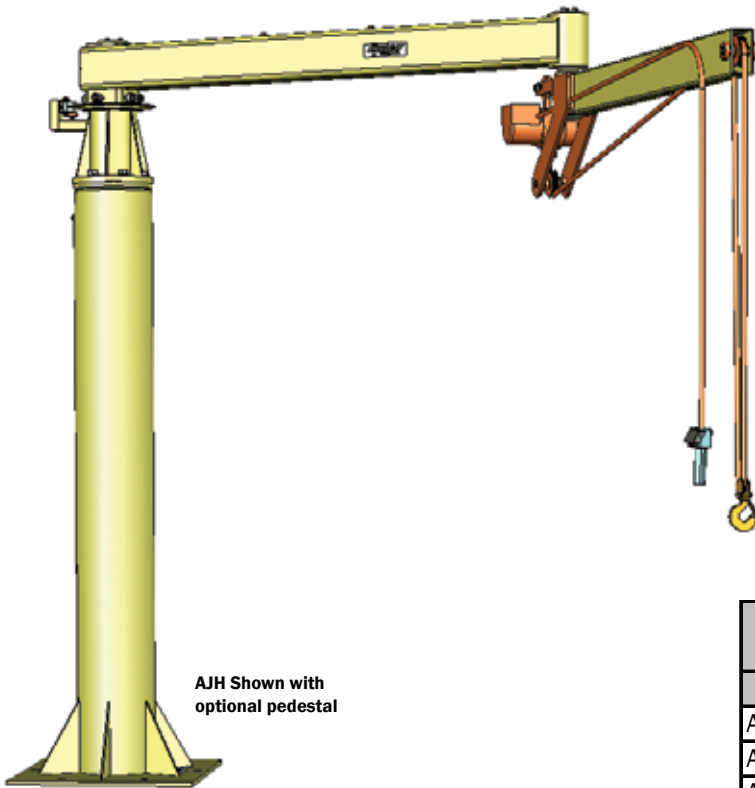

AJH Shown with optional pedestal

The Conco Articulated Jib Hoist (AJH) delivers a unique design, offering the advantages of a fully functioning Articulated Jib, integrated with the strength to lift and position all types of payloads. With the hoist located behind the second arm, the Conco AJH is ideal for low headroom applications and has the ability to maneuver around objects with full reach-in capability.

## Standard Features

- Standard models available to accommodate light to heavy lifting applications
- High precision bearings create smooth levels of operation
- Leveling bolts to minimize second arm drift
- Air hoist supplied with articulated jib

## Available Options

- Mounting options: overhead, trolley, pedestal wall mount or mobile/portable base
- 360° continuous rotation (electric or pneumatic) at the rotating joints
- Primary and secondary axes caliper disc brakes
- Primary and secondary axes rotation stops to keep arms in specific zones
- Customer specified air or electric hoist can be supplied, consult factory for availability and pricing

Model	Capacity* (lbs/kg)	Reach (ft/m)	Lift** (in/m)
<b>500 Series</b>			
AJH-500-12	500/227	12 /3.66	120/3.05
AJH-500-13	500/227	13 /3.96	120/3.05
AJH-500-14	500/227	14 /4.27	120/3.05
AJH-500-15	500/227	15 /4.57	120/3.05
AJH-500-16	500/227	16 /4.88	120/3.05
<b>1000 Series</b>			
AJH-1000-8	1000/454	8/2.44	120/3.05
AJH-1000-9	1000/454	9/2.74	120/3.05
AJH-1000-10	1000/454	10/3.05	120/3.05
AJH-1000-11	1000/454	11/3.35	120/3.05
AJH-1000-12	1000/454	12/3.66	120/3.05
AJH-1000-13	1000/454	13/3.96	120/3.05
AJH-1000-14	1000/454	14/4.27	120/3.05
AJH-1000-15	1000/454	15/4.57	120/3.05
AJH-1000-16	1000/454	16/4.88	120/3.05

\* Includes payload and end-effector

\*\*Standard hoist has 10' of lift; actual lift available depends on pedestal height

